Step 1 :Save   the update pack   to your cellphone
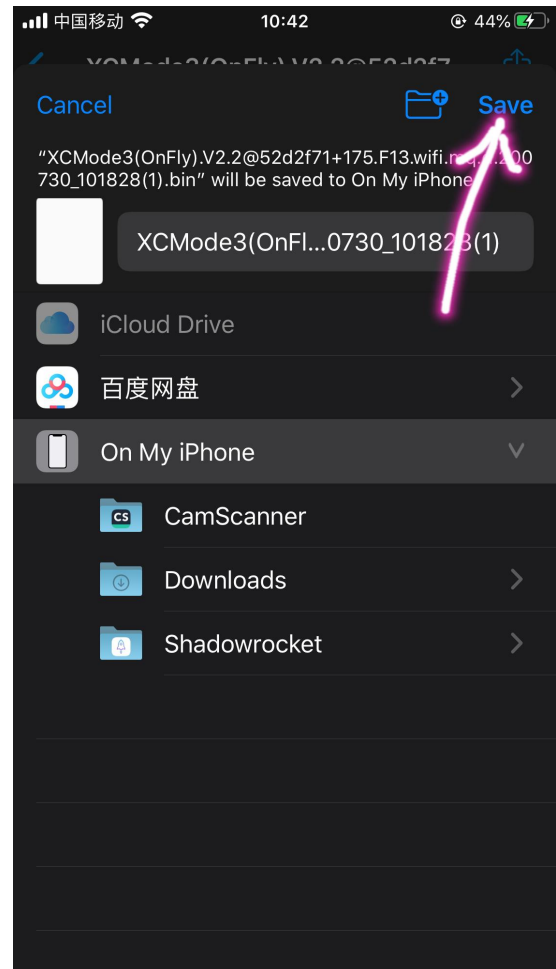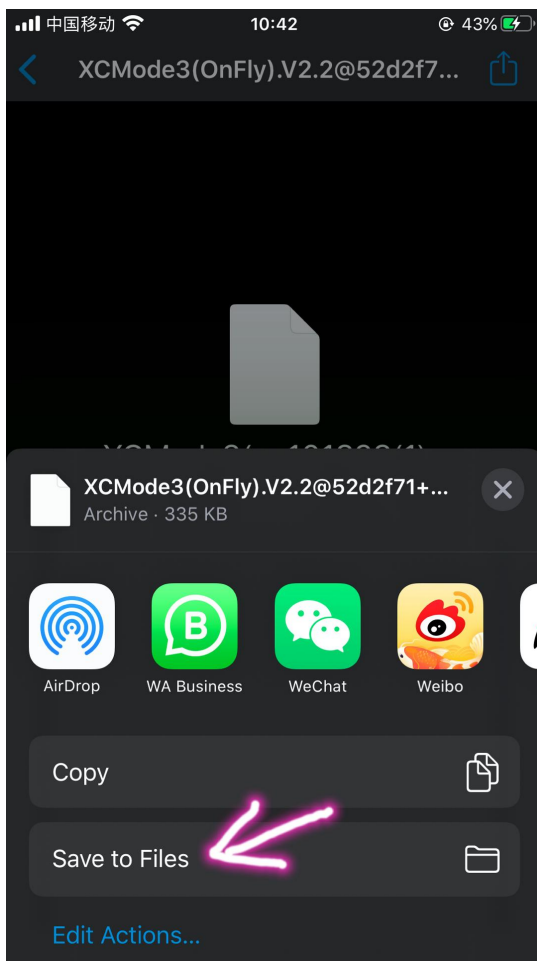
(No need open , just save) File Name '' XCMode3(OnFly)......200730_101828.bin ''

Left screen:
- XCMode3(OnFly).V2.2@52d2f7...
- XCMode3(OnFly).V2.2@52d2f71+...
- Archive · 335 KB
- AirDrop
- WA Business
- WeChat
- Weibo
- Copy
- Save to Files
- Edit Actions...

Right screen:
- Cancel / Save
- "XCMode3(OnFly).V2.2@52d2f71+175.F13.wifi.n...200 730_101828(1).bin" will be saved to On My iPhone
- XCMode3(OnFl...0730_10182 3(1)
- iCloud Drive
- 百度网盘
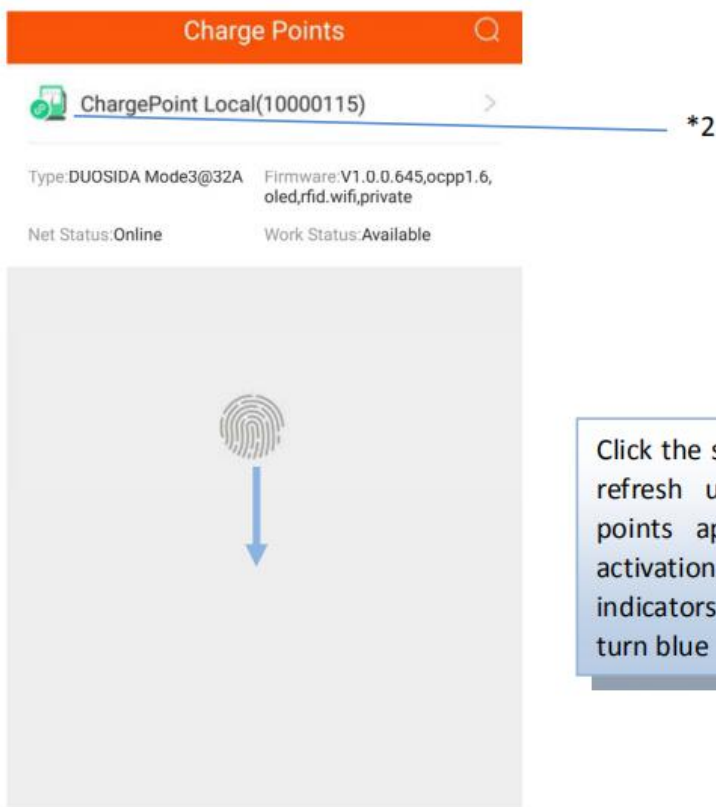- On My iPhone
  - CamScanner
  - Downloads
  - Shadowrocket

Step 2: Connect the your phone to station wifi

Find the network of DUOSIDA_XXXX, enter the password: duosida@cp

Step 3 : Open the App

Charge Points   🔍

ChargePoint Local(10000115)   >   *2

Type:DUOSIDA Mode3@32A   Firmware:V1.0.0.645,ocpp1.6, oled,rfid.wifi,private
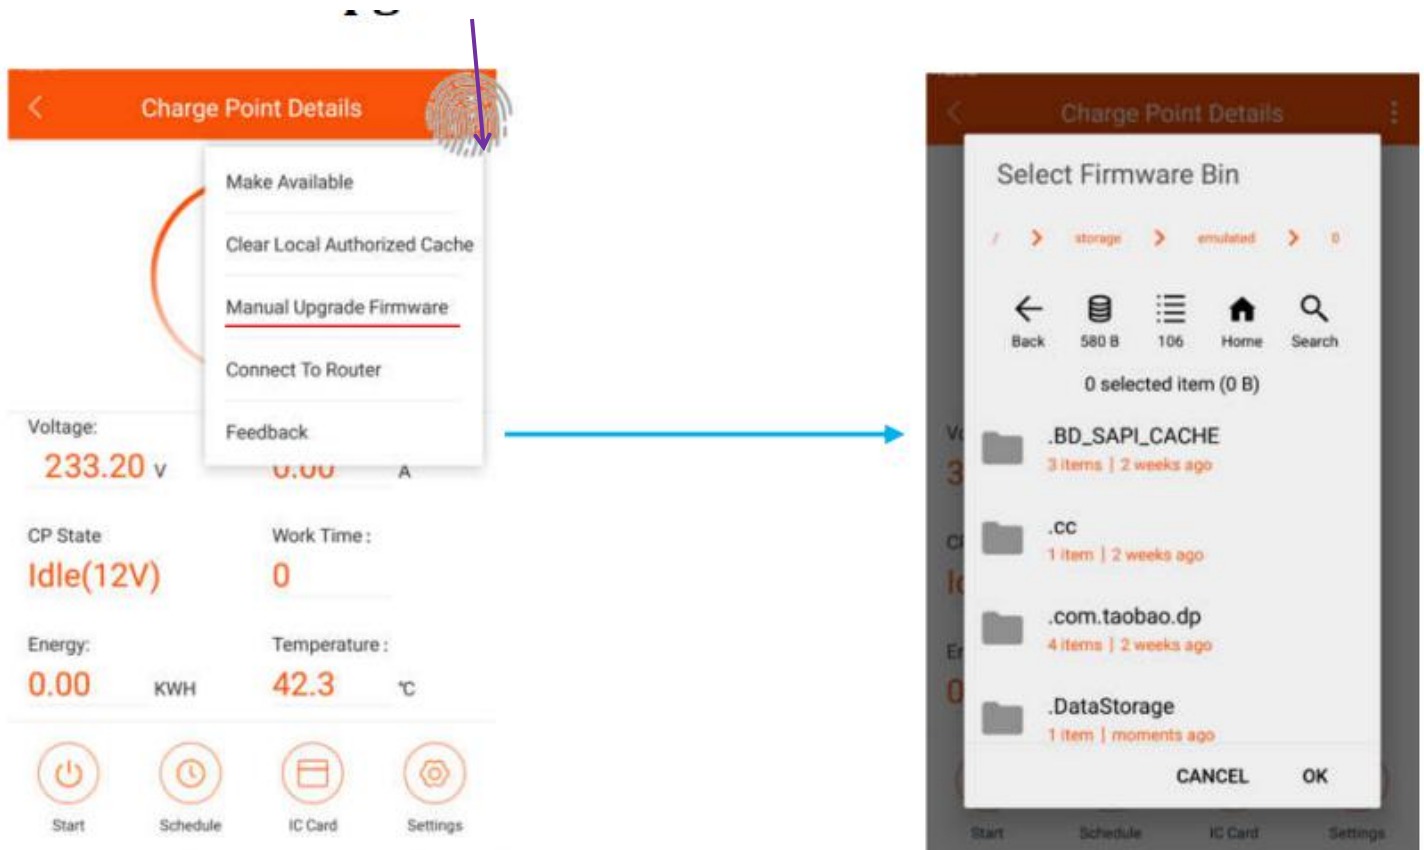
Net Status:Online   Work Status:Available

> Click the screen to scroll down and refresh until the list of charge points appears. After successful activation, the circular and arc indicators of the charge point will turn blue
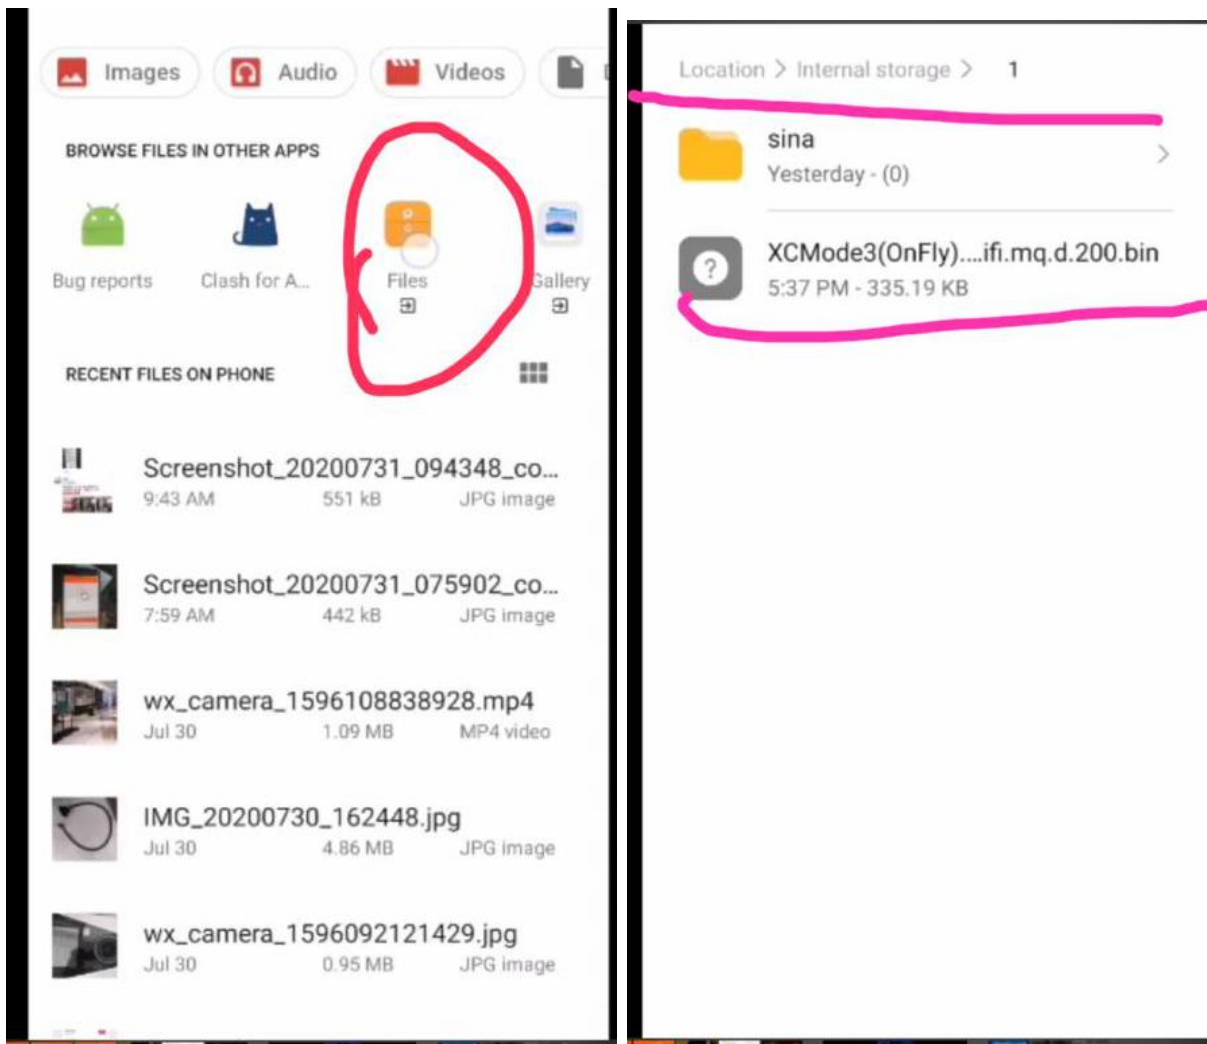
*2： If red appears here, please scroll down again to refresh

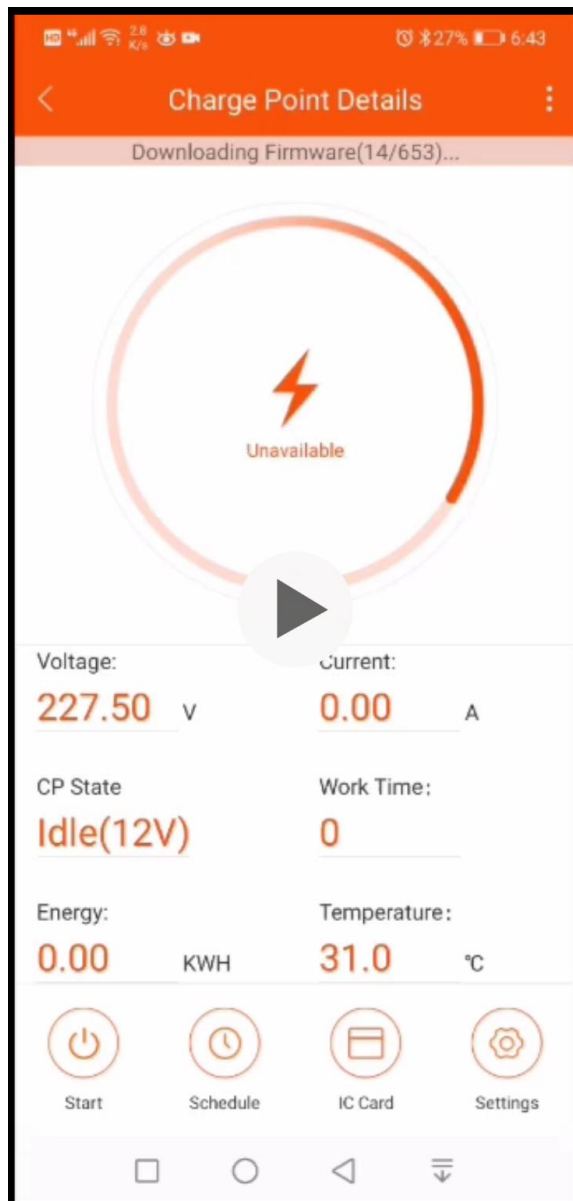## Step 4: Choose "Manual Upgrade Firmware" in App

Charge Point Details

Make Available

Clear Local Authorized Cache

Manual Upgrade Firmware

Connect To Router

Feedback

Voltage:
233.20 v   0.00   A

CP State
Idle(12V)   Work Time: **0**

Energy:
0.00 KWH   Temperature: **42.3** ℃

Start   Schedule   IC Card   Settings

Charge Point Details

Select Firmware Bin

/ > storage > emulated > 0

← Back   580 B   106   Home   Search

0 selected item (0 B)

📁 .BD_SAPI_CACHE
3 items | 2 weeks ago

📁 .cc
1 item | 2 weeks ago

📁 .com.taobao.dp
4 items | 2 weeks ago

📁 .DataStorage
1 item | moments ago

CANCEL   OK

Start   Schedule   IC Card   Settings

Step 5: Select the files

(Saved in cellphone by 1st step "XCMode3(OnFly)......200730_101828.bin")

Step 6 :Download the firmware

Step 7　:Restart when updating finished